




armfield

PRESSURE MEASUREMENT AND CALIBRATION

TH2
issue 3

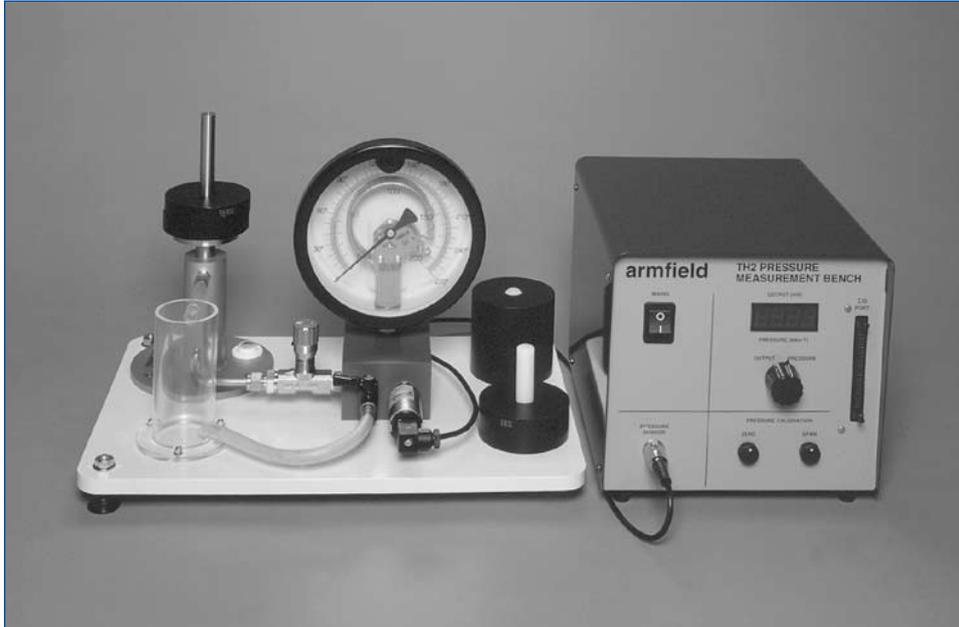

The Armfield Pressure Measurement and Calibration unit has been designed to introduce students to pressure and how different techniques can be employed to measure this variable.

Different fixed pressures are generated using a simple Dead-weight Pressure Calibrator for the purpose of calibrating the measuring devices. A Bourdon type pressure gauge and electronic type pressure sensor are connected to the calibrator to allow their characteristics, including accuracy and linearity, to be determined.


INSTRUCTIONAL CAPABILITIES

- Concepts of pressure (= Force/Area) and pressure scales
- Concepts of measurement and calibration
- Understanding the operation of a Bourdon gauge
- Calibration and the use of a Dead-weight Pressure Calibrator
- Sources of error in measurement and calibration

KEY FEATURES

- Includes simple Dead-weight Pressure Calibrator using water for safety and ease of use
- Bourdon gauge and electronic sensor included for calibration
- Operating mechanism of Bourdon gauge visible through clear scale
- Electrical sensor can be logged using a PC (optional teaching software available)

Thermodynamics

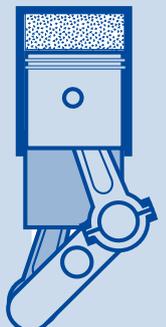

T

DETAILED EXPERIMENTAL CAPABILITIES

Teaching exercises are included to enable students to become familiar with the following topics:

Concept of Pressure = Force/Area:

- visualisation of the operation of a Bourdon type pressure gauge
- function of a Dead-weight Pressure Calibrator

Concepts of measurement and calibration:

- gauge and absolute pressures
- conversion of arbitrary scale into engineering units - correlating equations
- zero error
- scale error
- non-linearity

Characteristic behaviours of different sensors:

- Bourdon gauge
- pressure sensor
- use of damping to limit fluctuating readings

Sources of error:

- friction, wear and backlash (effect of increasing/decreasing pressure)
- manufacturing tolerances
- signal conditioning
- display resolution

Calibration in arbitrary units:

- calibration of Bourdon gauge (Angular displacement of needle)
- calibration of pressure sensor (Voltage output from sensor)

Calibration in engineering units:

- calibration of a Bourdon gauge (kNm^{-2})
- calibration of a pressure sensor and signal conditioning circuit (kNm^{-2})

Calibration of conditioning circuit and display using reference signal:

Project work:

- calibration of alternative gauges or sensors
- ageing and drift

DESCRIPTION

A bench top unit designed to introduce students to pressure, pressure scales and common devices available to measure pressure.

The equipment comprises a Dead-weight Pressure Calibrator (DPC) to generate a number of predetermined pressures, connected to a Bourdon gauge and electronic pressure sensor to allow their characteristics, including accuracy and linearity, to be determined.


The DPC consists of a precision ground piston and cylinder with a set of weights giving an operating range of 20 kNm^{-2} to 200 kNm^{-2} .

The Bourdon gauge and pressure sensor are mounted on a manifold block with a separate reservoir to contain the hydraulic fluid (water for safety and ease of use). Valves allow for easy priming, restricted flow of water to demonstrate the application of damping and the connection of alternative devices for calibration.

The gauge supplied is a traditional 6" diameter industrial instrument but fitted with a clear rotary scale to allow observation of the Bourdon tube and indicator mechanism. The scale is calibrated in degrees of rotation (independent of units of pressure) in addition to the usual scale calibrated in units of kNm^{-2} .

The electronic pressure sensor supplied incorporates a semi-conductor diaphragm that deflects when pressure is applied by the working fluid. This deflection generates a voltage output that is proportional to the applied pressure.

All power supplies, signal conditioning circuitry etc are contained in an electrical console with appropriate current protection devices and an RCD for operator protection. The output voltage from the pressure sensor is displayed on a digital meter. An additional conditioning circuit with user adjustable zero and span controls allows the output to be displayed as a direct reading pressure meter calibrated in units of pressure. Both signals are simultaneously routed to an I/O port for connection to a PC when using an optional interface device with educational software package (TH-304IFD).

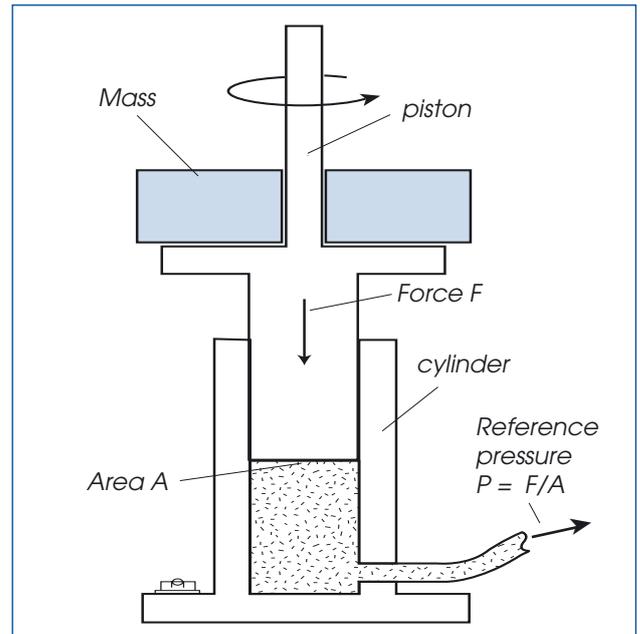

TH2: Schematic diagram of dead-weight pressure calibrator

OPTIONAL ACCESSORIES

TH-304IFD:

Educational software for TH1-TH5 on a single CD-ROM complete with Data-logger


RECOMMENDED INSTRUMENTS

Accurate weigh

balance: (0 - 5 kg)

Barometer: (to determine the atmospheric pressure)

DC calibrator: (to demonstrate calibration of instrumentation)

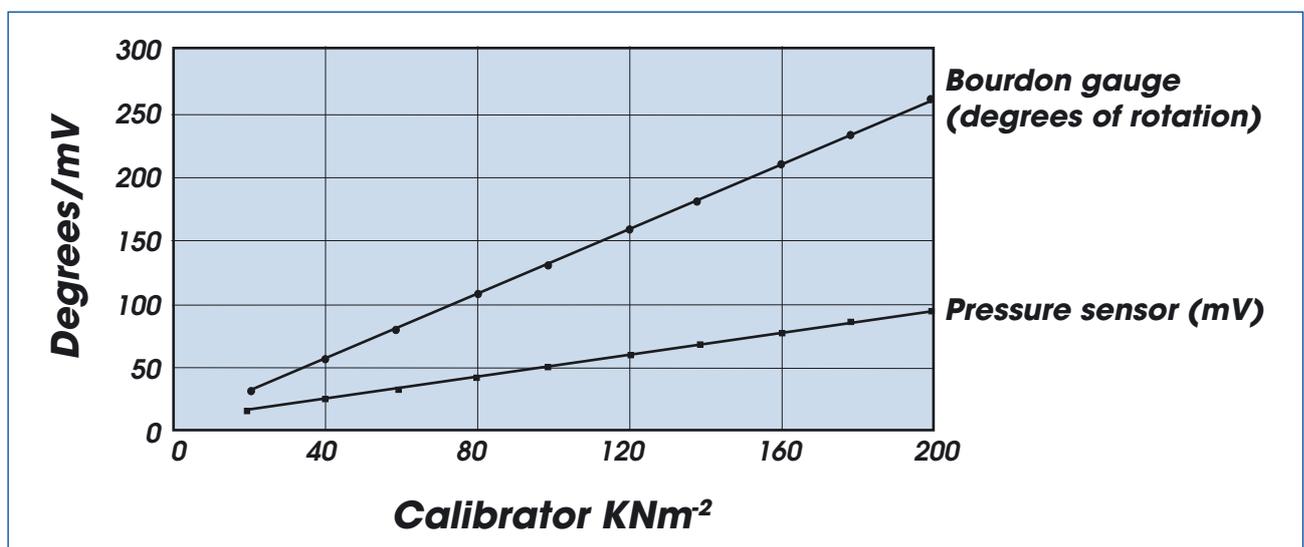

TH2: Calibration of Gauge and Sensor

ORDERING SPECIFICATION

- *A bench top unit comprising a simple dead-weight pressure calibrator with weights to generate a range of predetermined pressures that is connected to a Bourdon gauge and electronic pressure sensor. The Bourdon gauge incorporates an arbitrary scale in addition to the pressure scale and a clear acrylic front face allows observation of the Bourdon tube and the operating mechanism. A reservoir with isolating valve allows the calibrator, Bourdon gauge and pressure sensor to be easily primed.*
- *An electrical console houses the necessary electronics with current protection devices and an RCD for operator protection. A digital meter with selector switch displays the output from the pressure sensor as well as the conditioned reading in engineering units. Corresponding signals are routed to an I/O Port for connection to a PC. An optional interface device with educational software package is available.*
- *The dead-weight pressure calibrator, Bourdon gauge and pressure sensor are mounted on a common PVC baseplate. The electrical console is free standing.*

- *Pressure sensors, manometers or Bourdon gauges other than those supplied can be calibrated over the range 20 kNm⁻² to 200 kNm⁻².*
- *A comprehensive instruction manual is included with a range of fully detailed laboratory teaching exercises.*

SERVICES REQUIRED

Single phase mains electrical supply:

TH2-A: 220/240V/1ph/50Hz @ 3A

TH2-B: 120V/1ph/60Hz @ 5A

TH2-G: 220V/1ph/60Hz @ 3A

Fill with clean cold water (0.1 litres)

OVERALL DIMENSIONS

Instrumentation and Dead-weight pressure calibrator:

Height: 0.290m

Width: 0.400m

Depth: 0.275m

Electrical console:

Height: 0.215m

Width: 0.225m

Depth: 0.290m

SHIPPING SPECIFICATION

Volume: 0.07m³

Gross Weight: 15kg

Armfield Limited

Bridge House, West Street, Ringwood,
Hampshire BH24 1DY, England

Tel: +44 (0)1425 478781 Fax: +44 (0)1425 470916

E mail: sales@armfield.co.uk

URL: <http://www.armfield.co.uk>

USA Office:

Armfield Inc.

436 West Commodore Blvd (#2)

Jackson NJ 08527

Tel: (732) 928-3332 Fax: (732) 928-3542

E mail: info@armfieldinc.com

The TH range for the study of thermodynamics

TH1: Temperature Measurement and Calibration

TH2: Pressure Measurement and Calibration

TH3: Saturation Pressure

TH4: Recycle Loops

TH5: Expansion Processes of a Perfect Gas

Specifications may change without notice
iss3/5k/0904/San.